


# NOVA LUCE

**Supplier's name or trade mark:** NOVA LUCE S.A

**Supplier's address:** SCHIMATARI VIOTIAS 32009, GREECE

**Model identifier:** 9060613

**Type of light source:** LED

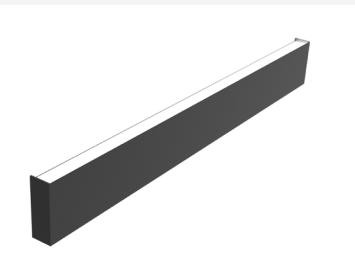

## Product information Sheet

### General Information

Material number	9060613
Type	Wall light
Product segment	INDOOR

### Dimensions

Length (in cm)	60 Cm
Width (in cm)	2.7 Cm
Height (in cm)	7.5 Cm
Net Weight	

### Material & Colour

Enclosure Material	Aluminium
Colour	Sandy Black
Adjustable	No

### Functionality

Switch Type	No
Function	LED PHILIPS SMD
Battery	No
USB Charger	No

### Technical Information

Protection Degree	IP44
Protection Class	
Mains Voltage	230V
max. Wattage	20W
Lumen	1478Lm
Equivalence With Incandescent Lamp (W)	
Colour Temperature	3000K
Nominal Lifetime (in h)	30000H
Switching Cycles	-
Colour Rendering Index (Ra, CRI)	CRI >90
Rated Lamp Power (0,1W precision)	-
Colour Tolerance (LED, SDCM)	

## Product information

Lighting technology used [LED/OLED/MIXED/OTHER]	LED
Non-directional or directional [NDLS/DLS]	
Mains or non-mains [MLS/NMLS]	
Connected light source (CLS) [yes/no]	
Colour-tunable light source [yes/no]	
Envelope [no/second/non-clear]	
High luminance light source [yes/no]	
Anti-glare shield [yes/no]	
Dimmable [yes/only with specific dimmers/no]	No

## General Product parameters

Energy consumption in on-mode (kWh/1000h)	11k
Energy efficiency class	F
Useful luminous flux ( $\Phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	
Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100K, that can be set :	3000K
On-mode power ( $P_{on}$ ), expressed in W [x,x]	
Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	
Colour rendering index, rounded to the nearest integer , or the range of CRI values that can be set	
Outer dimensions without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre):	
Spectral power distribution in the range 250 nm to 800 nm, at full-load	

## Claim of equivalent power (c)

If yes, equivalent power (W)

Chromaticity coordinates (x and y)

## Parameters for directional light sources

Peak luminous intensity (cd)
Beam angle in degrees, or the range of beam angles that can be set

## Parameters for LED and OLED light sources

R9 colour rendering index value	
Survival factor [x,xx]	
The lumen maintenance factor [x,xx]	70%
Displacement factor ( $\cos \varphi_1$ )	
Colour consistency in McAdam ellipses	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular Wattage	
If yes then replacement claim (W)	
Flicker metric (Pst Lm) [x,x]	
Stroboscopic effect metric (SVM) [X,X]	
Pon in W	



Contact | Support  
[www.novaluce.com](http://www.novaluce.com)